


Specifications


Noi	ninal Voltage	12V		
Rated Cap	pacity (20 hour rate)	150AH		
Dimension	Total Height (with terminals)	273mm(10.75inches)		
	Height	269mm(10.59inches)		
	Length	327mm(12.87inches)		
	Width	182mm(7.17inches)		
	Weight	Approx.42.6kg (93.92Ibs)		

Characteristics


Capacity 77° F (25° C)		20 hour rate (150AH			
		10 hour rate (135AH			
		5 hour rate (2	123AH			
Internal Resistance		Full charged 7	2.8mΩ			
Capacity affect	tod	104°F(40°C)	102%			
by Temperature (20 hour rate)		77 ° F(25°C)	100%			
		32 T (0℃)	85%			
		5 T (-15℃)	65%			
Self-Discharge 77'F(25°C)		Capacity after	91%			
		Capacity after	82%			
		Capacity after	64%			
Standard Term	inal	M8				
Max. Dischar Current 77°F (2	_	1500A (5s)				
Cranking	(30-se	Cranking ec amps to 7.2V @	1050A			
Performance	(30-se	Cold Cranking camps to 7.2V @	900A			
Reserve Capacity			@ 25Amps	295Min		
(Minutes to 10.5V at 80°F (27°C)			@ 75Amps	80Min		
Charging (Constant	Cycle		rging Current 50A Or Small 9V/77 F (25°C)			
Voltage)	Float	13.6V~13.8V/77∓(25℃)				

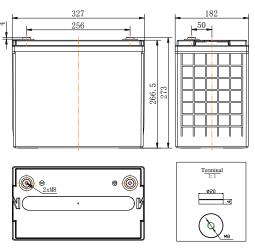

Discharge characteristics 77°F (25°C)

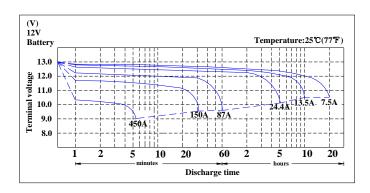

Duration of discharge vs. Discharge current

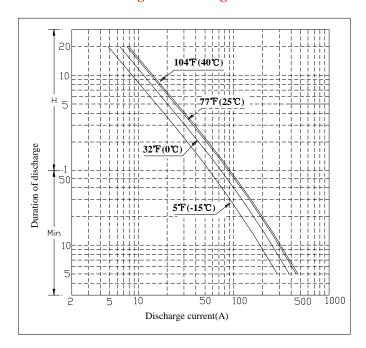

Constant Current Discharge Rating Amperes @ 77 °F (25°C)

Cut off voltage V/cell	15M	30M	45M	1H	2Н	3Н	5H	8Н	10H	12H	20H	24H
1.75V	220	144	105	85.5	51.2	34.0	24	16.3	13.50	11.50	7.50	6.35

FULLRIVER DC BATTERIES

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specification are subject to modification without notice. Contact Fullriver for the latest information.