


**Specifications**

Nominal Voltage		8V
Rated Capacity (20 hour rate)		160AH
Dimension	Total Height (with terminals)	272mm(10.71inches)
	Height	268mm(10.55inches)
	Length	260mm(10.24inches)
	Width	182mm(7.17inches)
Weight		Approx.31.7 kg (69.89lbs)


**Discharge characteristics 77°F (25°C)**

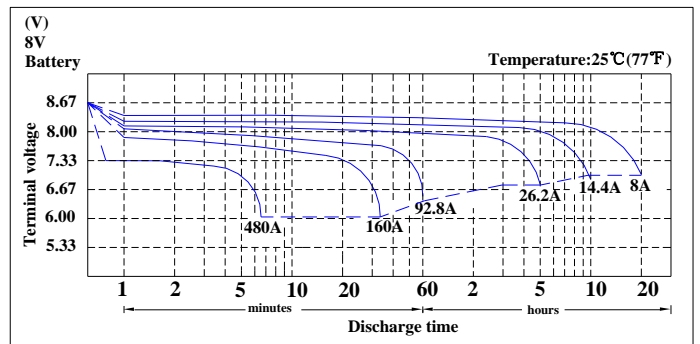

**Characteristics**

Capacity 77°F (25°C)	20 hour rate (8A to 7.0Volts)	160AH
	10 hour rate (14.4A to 7.0Volts)	144AH
	5 hour rate (26.2A to 6.8Volts)	131AH
Internal Resistance	Full charged 77°F (25°C)	2.4mΩ
Capacity affected by Temperature (20 hour rate)	104°F (40°C)	102%
	77°F (25°C)	100%
	32°F (0°C)	85%
	5°F (-15°C)	65%
Self-Discharge 77°F (25°C)	Capacity after 3 month storage	91%
	Capacity after 6 month storage	82%
	Capacity after 12 month storage	64%
Standard Terminal	M8	
Max. Discharge Current 77°F (25°C)	2000A (5s)	
Reserve Capacity (Minutes to 7 V at 80°F (27°C))	@ 25Amps	315Min
	@ 56Amps	112Min
Charging (Constant Voltage)	Cycle	Initial Charging Current 32A Or Small 9.67V~9.93V/77°F (25°C)
	Float	9.06V~9.2V/77°F (25°C)

**Duration of discharge vs. Discharge current**

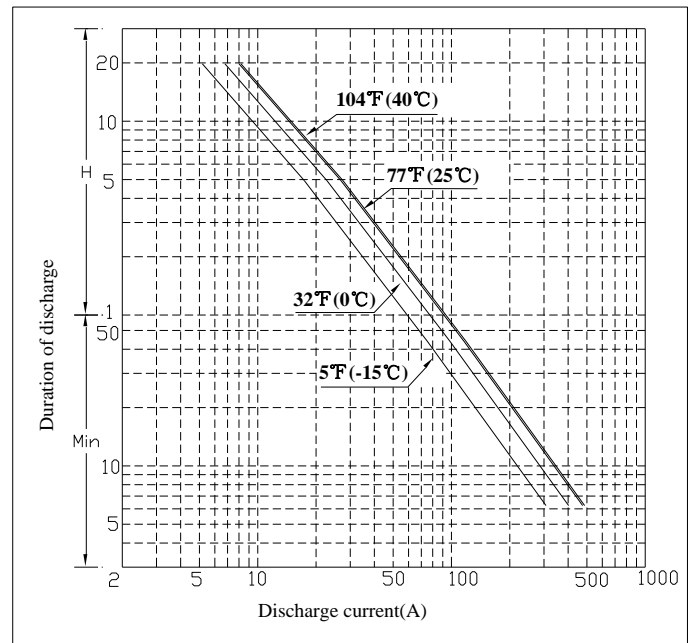

**Constant Current Discharge Rating Amperes @ 77 °F (25°C)**

Cut off voltage V/cell	30M	45M	1H	2H	3H	5H	8H	10H	12H	20H	24H
1.75V	150	110	90.2	56.1	39.2	25.7	17.4	14.4	12.3	8.0	6.8