


Specifications

| | | |
|-------------------------------|-------------------------------|--------------------------|
| Nominal Voltage | | 12V |
| Rated Capacity (20 hour rate) | | 65AH |
| Dimension | Total Height (with terminals) | 176mm(6.93inches) |
| | Height | 176mm(6.93inches) |
| | Length | 351mm(13.82inches) |
| | Width | 167mm(6.57inches) |
| Weight | | Approx.23.6kg (52.03lbs) |


Discharge characteristics 77°F (25°C)

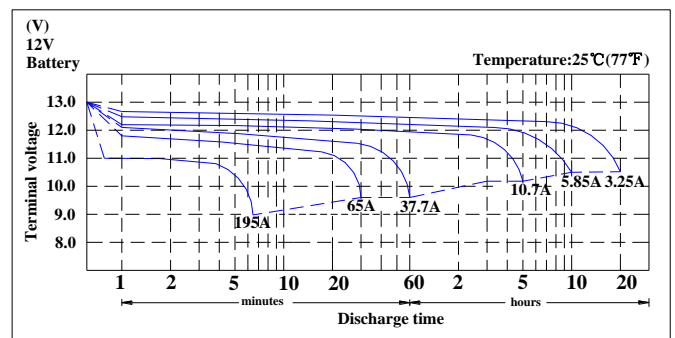

Characteristics

| | | |
|---|---|---|
| Capacity 77°F (25°C) | 20 hour rate (3.25A to 10.5Volts) | 65AH |
| | 10 hour rate (5.85A to 10.5Volts) | 58.5AH |
| | 5 hour rate (10.7A to 10.2Volts) | 53.5AH |
| Internal Resistance | Full charged Battery 77°F (25°C) | 6 mΩ |
| Capacity affected by Temperature (20 hour rate) | 104°F (40°C) | 102% |
| | 77°F (25°C) | 100% |
| | 32°F (0°C) | 85% |
| | 5°F (-15°C) | 65% |
| Self-Discharge 77°F (25°C) | Capacity after 3 month storage | 91% |
| | Capacity after 6 month storage | 82% |
| | Capacity after 12 month storage | 64% |
| Standard Terminal | M6 | |
| Max. Discharge Current 77°F (25°C) | 900A (5s) | |
| Cranking Performance | Cranking Amps (30-sec amps to 7.2V @ 32° F (0° C) | 510A |
| | Cold Cranking Amps (30-sec amps to 7.2V @ 0° F (-18° C) | 430A |
| Reserve Capacity (Minutes to 10.5V at 80°F (27°C) | @ 25Amps | 100Min |
| | @ 75Amps | 28Min |
| Charging (Constant Voltage) | Cycle | Initial Charging Current 13A Or Small 14.5V~14.9V/77°F (25°C) |
| | Float | 13.6V~13.8V/77°F (25°C) |

Duration of discharge vs. Discharge current

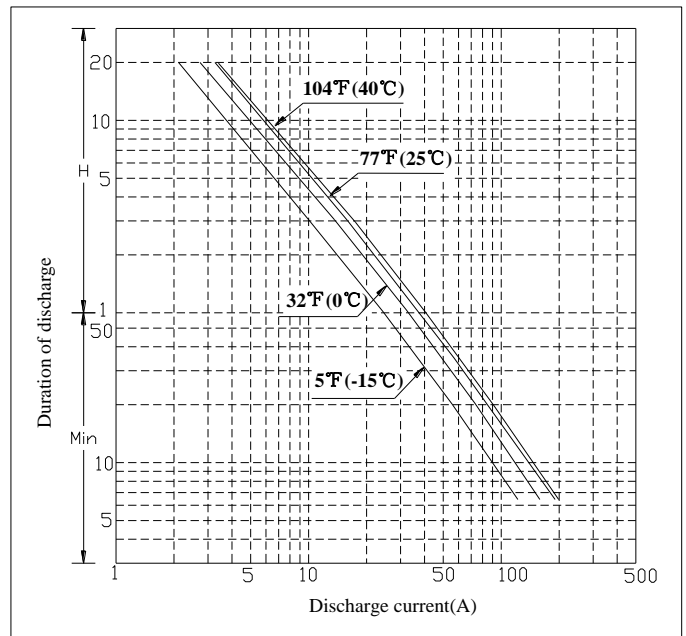

Constant Current Discharge Rating Amperes @ 77 °F (25°C)

| | | | | | | | | | | | | |
|------------------------|-----|-----|-----|------|------|------|------|-----|------|------|------|------|
| Cut off voltage V/cell | 15M | 30M | 45M | 1H | 2H | 3H | 5H | 8H | 10H | 12H | 20H | 24H |
| 1.75V | 100 | 70 | 45 | 36.9 | 19.6 | 14.7 | 10.3 | 7.1 | 5.85 | 4.98 | 3.25 | 2.72 |