


Specifications

Nominal Voltage		12V
Rated Capacity (20 hour rate)		90AH
Dimension	Total Height (with terminals)	215mm(8.46 inches)
	Height	211mm(8.31 inches)
	Length	307mm(12.09inches)
	Width	169mm(6.65inches)
Weight		Approx.29.2kg (64.37lbs)


Discharge characteristics 77°F (25°C)

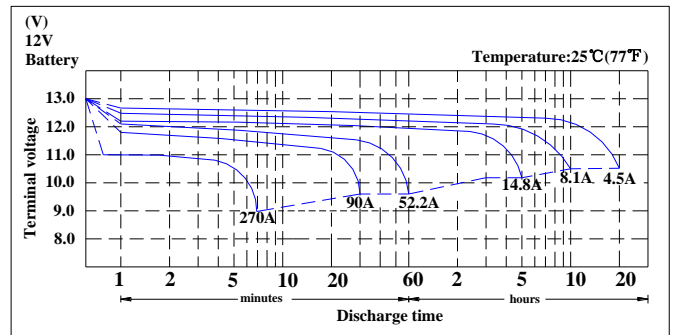

Characteristics

Capacity 77°F (25°C)	20 hour rate (4.5A to 10.5Volts)	90AH
	10 hour rate (8.1A to 10.5Volts)	81AH
	5 hour rate (14.8A to 10.2Volts)	74AH
Internal Resistance	Full charged Battery 77°F (25°C)	4.5mΩ
Capacity affected by Temperature (20 hour rate)	104°F (40°C)	102%
	77°F (25°C)	100%
	32°F (0°C)	85%
	5°F (-15°C)	65%
Self-Discharge 77°F (25°C)	Capacity after 3 month storage	91%
	Capacity after 6 month storage	82%
	Capacity after 12 month storage	64%
Standard Terminal	M6	
Max. Discharge Current 77°F (25°C)	1000A (5s)	
Cranking Performance	Cranking Amps (30-sec amps to 7.2V @ 32° F (0° C)	630A
	Cold Cranking Amps (30-sec amps to 7.2V @ 0° F (-18° C)	530A
Reserve Capacity (Minutes to 10.5V at 80°F (27°C)	@ 25Amps	140Min
	@ 75Amps	38Min
Charging (Constant Voltage)	Cycle Initial Charging Current 18A Or Small 14.5V~14.9V/77°F (25°C)	
	Float 13.6V~13.8V/77°F (25°C)	

Duration of discharge vs. Discharge current

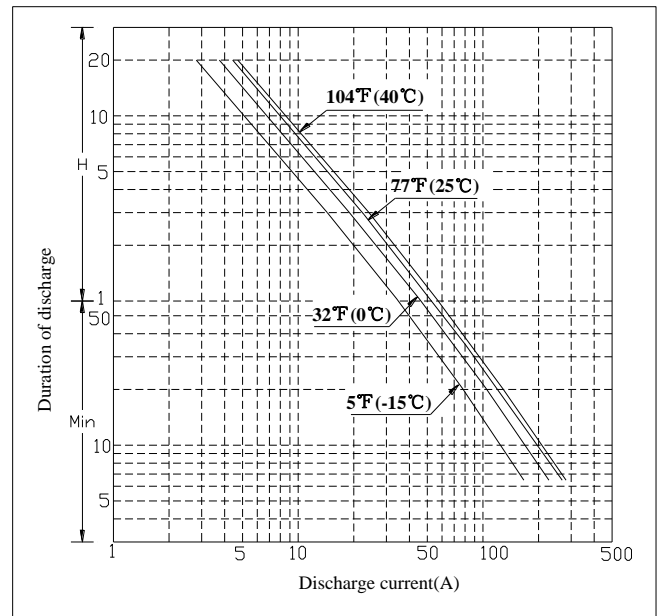

Constant Current Discharge Rating Amperes @ 77 °F (25°C)

Cut off voltage V/cell	15M	30M	45M	1H	2H	3H	5H	8H	10H	12H	20H	24H
1.75V	130	84	62	51.2	27.1	20.4	14.3	9.8	8.10	6.90	4.50	3.77