



# HC110 SPECIFICATIONS

## BATTERY DESIGN

- Absorbent glass mat (AGM) technology
- 12V battery VRLA
- Can be mounted in any orientation except inverted.
- US DOT and IATA certified non-spillable
- Sealed Construction (Non-Spillable Battery)
- Can be fitted with TP brass automotive adaptor on request.
- Shipped fully charged - just install and go!
- Suited for repeated discharges such as running your vehicle with winches or other electrical accessories.

## PERFORMANCE FEATURES

- ✧ PHCA: 2200A at 80°F (27°C) for 5 seconds
- ✧ PCCA: 1540A at 0°F (-18°C) for 5 seconds
- ✧ CCA: 1100A at 0°F (-18°C)
- ✧ CA/MCA: 1360A at 32°F (0°C)
- ✧ HCA: 1560A at 80°F (27°C)
- ✧ Reserve capacity: 230 minutes
- ✧ Short circuit current: 5000A
- ✧ Operation temperature range: 5°F (-15°C) to 122°F (50°C)

## Nominal Dimensions

Length		Width		Height		Total Height		Weight	
mm	in	mm	in	mm	in	mm	in	kg	pound
330	12.99	173	6.81	214	8.43	237	9.33	34.6	76.1


## HIGH RATE DISCHARGE AT 77°F (25°C)

5 sec.	10 sec.	20 sec.	30 sec.
2200A	2000A	1780A	1590A

## EXTENDED DISCHARGE AT 77°F (25°C) TO 10.02V

5min	15min	1hr	3hr	5hr	10hr	20hr
414A	208A	69.5A	29A	19.2A	10.9A	5.6A

## PHYSICAL CHARACTERISTICS

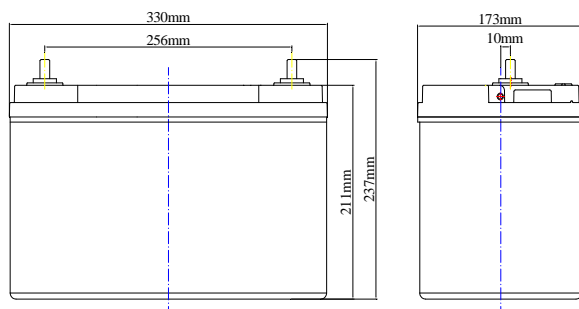

## Terminal Type: M10M

