



# RT 680 (6V8.0Ah)

RT series is a general purpose battery with 5 years design life in float service . It meets with IEC and JIS standards .With up-dated AGM valve regulated technology and high purity raw materials, the RT series battery has reliable standby service life. It is suitable for UPS/EPS, medical equipment, emergency light and security systems applications.




## Specification

Cells Per Unit	3
Voltage Per Unit	6
Capacity	8.0Ah@20hr-rate to 1.75V per cell @25°C
Weight	Approx. 1.2 Kg(Tolerance±4%)
Max. Discharge Current	80 A (5 sec)
Internal Resistance	Approx. 12 mΩ
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C±5°C
Float charging Voltage	6.85 to 6.95 VDC/unit Average at 25°C
Recommended Maximum Charging Current Limit	2.4 A
Equalization and Cycle Service	7.3 to 7.4 VDC/unit Average at 25°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.
Terminal	Faston Tab 187(F1)/Faston tab 250(F2)
Constainer Material	A.B.S. UL94-HB, UL94-V0 Optional.



## Dimensions

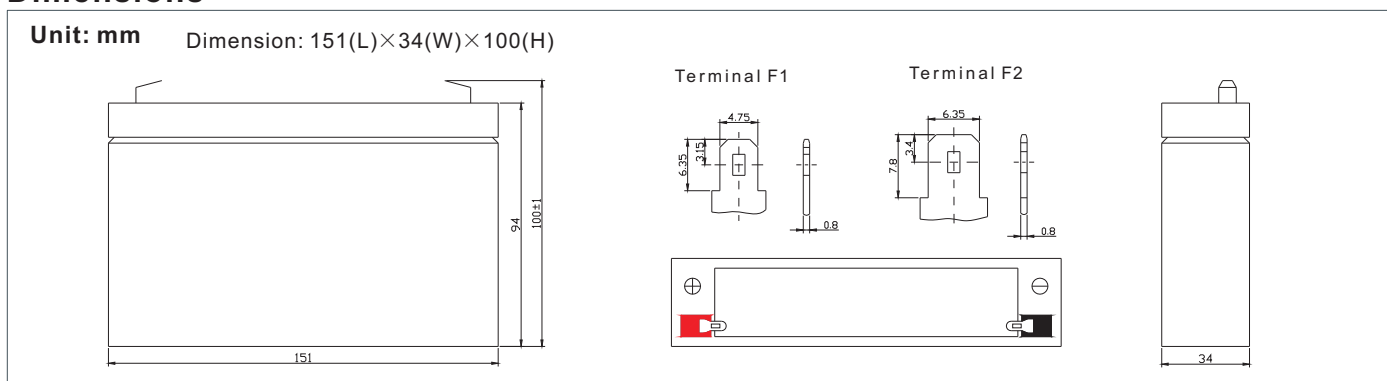

### Constant Current Discharge Characteristics : A(25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
4.80V	31.55	20.69	15.41	8.202	5.199	3.179	2.095	1.706	1.402	0.924	0.800	0.428
5.00V	30.41	20.17	14.91	8.097	5.130	3.115	2.056	1.682	1.390	0.920	0.792	0.424
5.10V	28.63	19.17	14.50	7.973	5.081	3.082	2.038	1.665	1.381	0.912	0.779	0.413
5.25V	25.73	17.93	13.68	7.753	5.019	3.042	2.020	1.641	1.369	0.904	0.776	0.404
5.40V	23.06	16.72	12.90	7.497	4.949	3.017	1.996	1.585	1.362	0.900	0.763	0.388
5.55V	20.17	15.33	11.90	7.212	4.832	2.896	1.957	1.562	1.357	0.893	0.751	0.381

### Constant Power Discharge Characteristics : W(25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
4.80V	171.1	113.4	85.01	46.94	31.08	18.73	12.52	10.21	8.400	5.531	4.790	2.568
5.00V	166.7	111.1	83.79	46.46	30.62	18.48	12.32	10.07	8.325	5.509	4.745	2.547
5.10V	158.5	106.7	82.68	46.05	30.40	18.32	12.21	9.97	8.274	5.468	4.684	2.482
5.25V	144.7	102.3	78.38	45.11	29.99	18.13	12.12	9.84	8.208	5.421	4.651	2.440
5.40V	130.5	95.67	74.05	44.04	29.60	18.00	11.98	9.51	8.170	5.398	4.580	2.342
5.55V	115.1	89.07	69.74	42.84	28.95	17.37	11.75	9.372	8.141	5.360	4.512	2.305


All mentioned values are average values(Tolerance±2%).

# RT 680

# 6V8.0Ah



**Effect of temperature on long term float life**

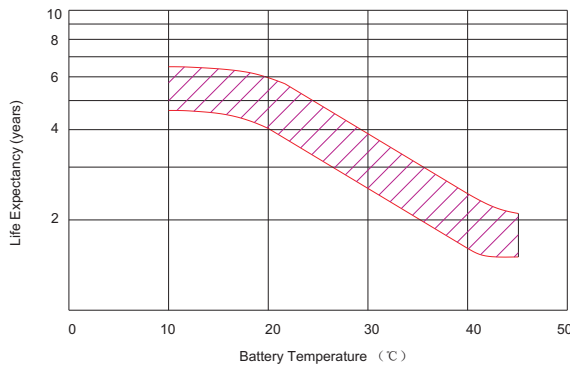

**Storage characteristic**




Supplementary charge required (Carry out supplementary charge before use if 100% capacity is required)

Supplementary charge required before use. This supplementary charge will help to recover the capacity and should be made as early as possible.

Supplementary charge may often fail to recover the capacity. The battery should never be left standing till this state is reached


Supplementary charge and storage guidelines

**Charge characteristic Curve for standby use**

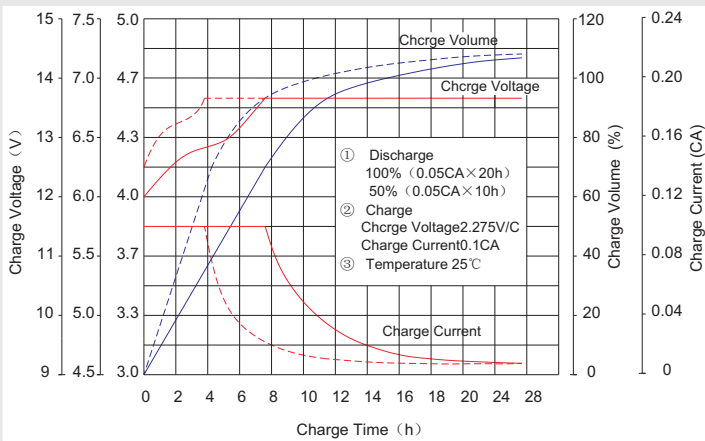

① Discharge  
100% (0.05CA×20h)  
50% (0.05CA×10h)  
② Charge  
Charge Voltage 2.275V/C  
Charge Current 0.1CA  
③ Temperature 25°C

**Discharge characteristic Curve**

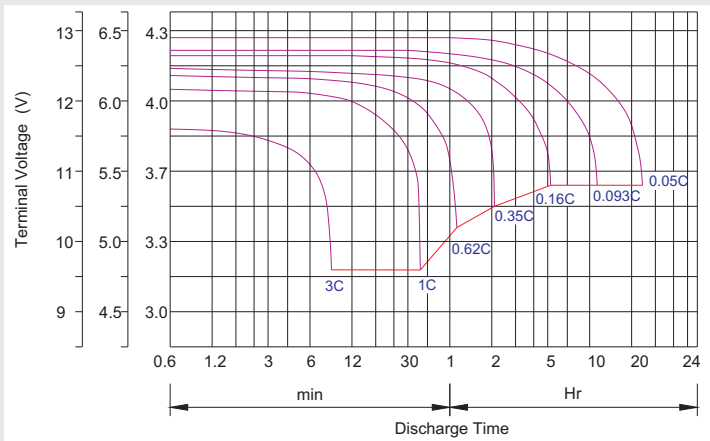

## Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	6V&12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
	2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM Battery	6V&12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
	2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

## Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.75V	1.70V	1.60V
Discharge Current (A)	(A) ≤ 0.2C	0.2C < (A) < 1.0C	(A) ≥ 1.0C

**Charge the batteries at least once every six months, if they are stored at 25°C.**

Charging Method:

Constant Voltage	-0.2Cx2h+2.4-2.45V/cellx24h, Max. Current 0.3C
Constant Current	-0.2Cx2h+0.1Cx12h
Fast	-0.2Cx2h+0.3Cx4h

<b>Bolt</b>	M5	M6	M8
<b>Terminal</b>	F3 F4 F13 F18 T25 T26	F8 F11 F12-1 F15	F5 F9 F10 F12 F14 F16
<b>Torque</b>	6~7N·m	8~10N·m	10~12N·m

## Maintenance & Cautions

### Float Service:

- ※ Every month, recommend inspection every battery voltage.
  - ※ Every three months, recommend equalization charge for one time.
- Equalization charge method:
- Discharge: 100% rate capacity discharge.
- Charge: Max. current 0.3CA, constant voltage 2.4-2.45V/Cell charge 24h.
- ※ Effect of temperature on float charge voltage: -3mV/°C/Cell.
  - ※ Length of service life will be directly affected by the number of discharge cycles, depth of discharge, ambient temperature and charging voltage.